


Central Article Code: B19030C17-A
 Local Code: EA406

Created: 24/02/2020
 Modified: 10/01/2023

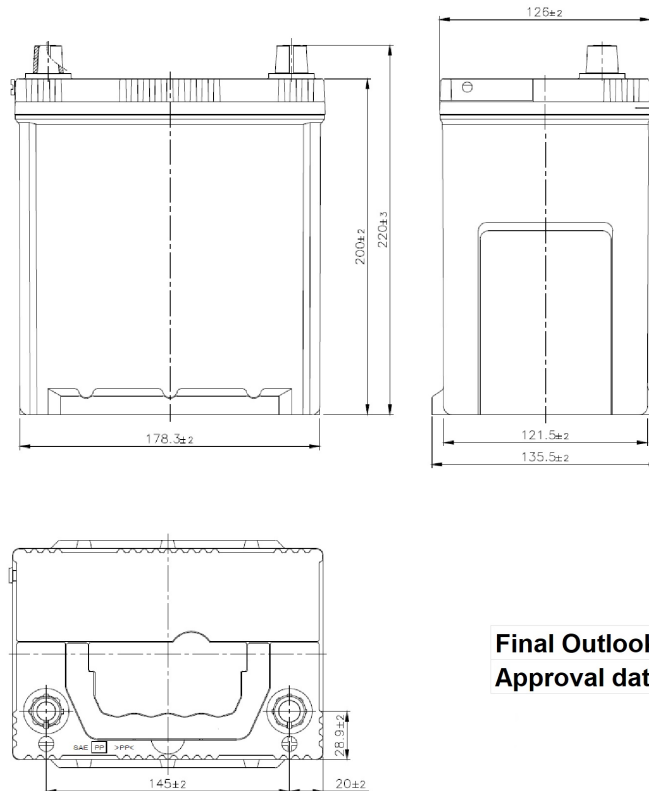

Final Outlook	B1917-A
Approval date	01/02/2022

PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	40.0 20 h
Cranking (A):	350 EN
Charge:	WET
Technology:	Vented/Flooded
Grid:	Ca/Ca
Vibration:	V1 (30Hz+/-2Hz/3g/2h)
Endurance:	E1 (180 cycles@25%)

STD. DIMENSIONS

Length (mm ± 2):	187
Width (mm ± 2):	127
Height (mm ± 2):	220
Total Weight (kg ± 5%):	9.30

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	B19	BLACK
Hold Down:	B1	
H.D. Adapter:	No	

COVER

Type:	Double with Integrat	BLACK
Polarity:	ETN 0	
Terminals:	JIS taper post	
Terminal Adapter:	From JIS to EN (Ring adapter)	
SOCI:	No	
Ventilation:	Central	
Filter:	2 Filters	
Lateral Plug:	Standard	Left side RED shape

PLUGS

Type:	1 x Vent Sealed (JIS)	BLACK
-------	-----------------------	-------

HANDLES

Type:	1 x Integrated	BLACK
-------	----------------	-------

OTHERS

Degassing Tube:	No
-----------------	----

C.O. from B19030C03-A (Grey to Black)