


Central Article Code: LB1046C11-D
 Local Code: EA472

Created: 24/02/2020
 Modified: 10/01/2023

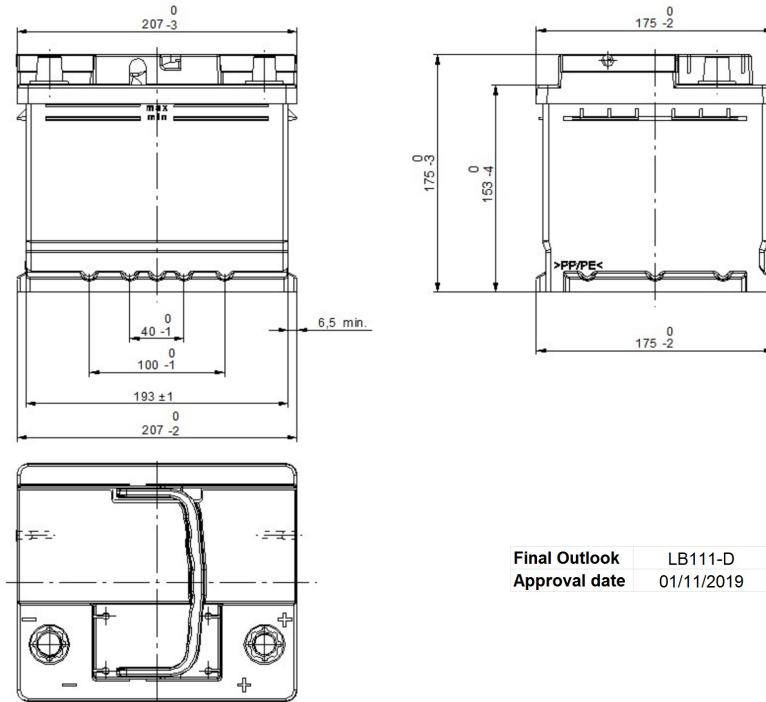

PERFORMANCES

| | |
|---------------|-----------------------|
| Voltage (V): | 12 V |
| C20 (Ah): | 47.0 20 h |
| Cranking (A): | 450 EN |
| Charge: | WET |
| Technology: | Vented/Flooded |
| Grid: | Ca/Ca |
| Vibration: | V1 (30Hz+/-2Hz/3g/2h) |
| Endurance: | E2 (90 cycles@50%) |

STD. DIMENSIONS

| | |
|-------------------------|-------|
| Length (mm ± 2): | 207 |
| Width (mm ± 2): | 175 |
| Height (mm ± 2): | 175 |
| Total Weight (kg ± 5%): | 11.40 |

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

| | | |
|---------------|-----|-------|
| Type: | LB1 | BLACK |
| Hold Down: | B13 | |
| H.D. Adapter: | No | |

COVER

| | | |
|-------------------|----------------------|----------------------------|
| Type: | Double with Integrat | BLACK |
| Polarity: | ETN 0 | |
| Terminals: | EN taper post | |
| Terminal Adapter: | No | |
| SOCI: | No | |
| Ventilation: | Central | |
| Filter: | 2 Filters | |
| Lateral Plug: | Standard | Left side BLACK shape |

PLUGS

| | | |
|-------|---------------------------|-------|
| Type: | 1 x Vent Sealed PSL-OE ha | BLACK |
|-------|---------------------------|-------|

HANDLES

| | | |
|-------|-----------------------|-------|
| Type: | 1 x PSL OE Integrated | BLACK |
|-------|-----------------------|-------|

OTHERS

| | |
|-----------------|----|
| Degassing Tube: | No |
|-----------------|----|

C.O. from LB1046C02-A (PSL-AM to PSL-OE)