


CUSTOMER DATASHEET

Printed: 08/11/2023

Product Management
Transportation Europe

Central Article Code: LB3070C11-C Created: 24/02/2020

Local Code: EA722 Modified: 10/01/2023

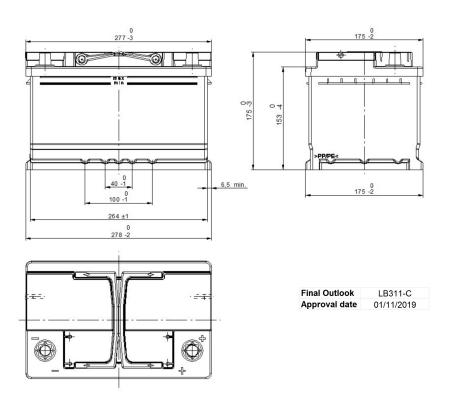

PERFORMANCES		CONTAINER
Voltage (V):	12 V	Type: LB3 BLACK
C20 (Ah):	72.0 20 h	Hold Down: B13
Cranking (A):	720 EN	H.D. Adapter: No
Charge:	WET	COVER
Technology:	Vented/Flooded	Type: Double with Integrat BLACK
Grid:	Ca/Ca	Polarity: ETN 0
Vibration:	V1 (30Hz+/-2Hz/3g/2h)	Terminals: EN taper post
Endurance:	E2 (90 cycles@50%)	Terminal Adapter: No
	22 (00 0) 0.00 (600 70)	SOCI: No
		Ventilation: Central
STD. DIMENSIONS		Filter: 2 Filters
Length (mm ± 2):	278	Lateral Plug: Standard Left side BLACK shape
Width (mm ± 2):	175	PLUGS
Height (mm ± 2):	175): 15.90	Type: 1 x Vent Sealed PSL-OE ha BLACK
Total Weight (kg ± 5%). 15.90	HANDLES
		Type: 2 x PSL OE Integrated BLACK
		OTHERS
		Degassing Tube: No
All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.		
,		C.O. from LB3070C03-A (PSL-AM to PSL-OE)