
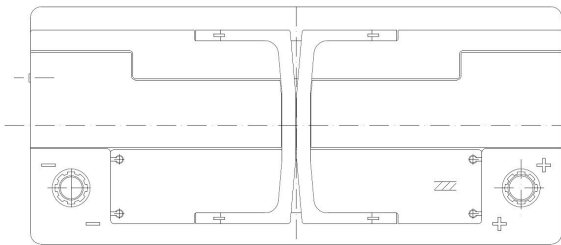
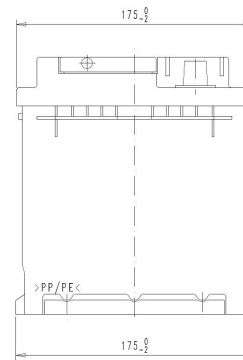


Central Article Code: L06080C05-F
 Local Code: EB1100

Created: 18/04/2018
 Modified: 31/07/2020

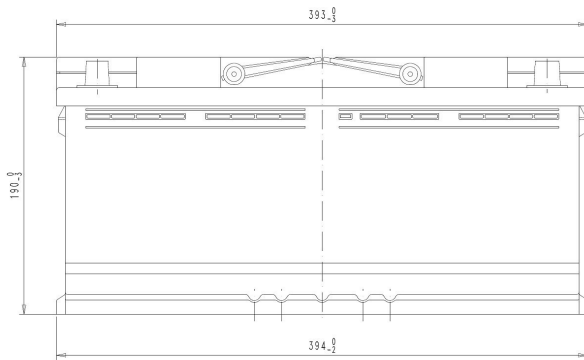

Final Outlook	L0605-F
Approval date	15/06/2018

PERFORMANCES

Voltage (V):	12 V	
C20 (Ah):	110.0	20 h
Cranking (A):	800	EN2 CCA
Charge:	WET	
Technology:	Vented/Flooded	
Grid:	Ca/Ca	
Vibration:	Manufactured Specific	
Endurance:	FIAT Requirement	

STD. DIMENSIONS

Length (mm ± 2):	392
Width (mm ± 2):	175
Height (mm ± 2):	190
Total Weight (kg ± 5%):	26.30

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	L06	BLACK
Hold Down:	B13	
H.D. Adapter:	No	

COVER

Type:	Double with Integrat	BLACK
Polarity:	ETN 0	
Terminals:	EN taper post	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Central	
Filter:	2 Filters	
Lateral Plug:	Standard	Left side BLACK shape

PLUGS

Type:	1 x Vent Sealed (STE)	BLACK
-------	-----------------------	-------

HANDLES

Type:	2 x Integrated	BLACK
-------	----------------	-------

OTHERS

Degassing Tube:	No
-----------------	----