


Central Article Code: D26044C07-A
 Local Code: EC605

Created: 06/09/2005
 Modified: 31/07/2020

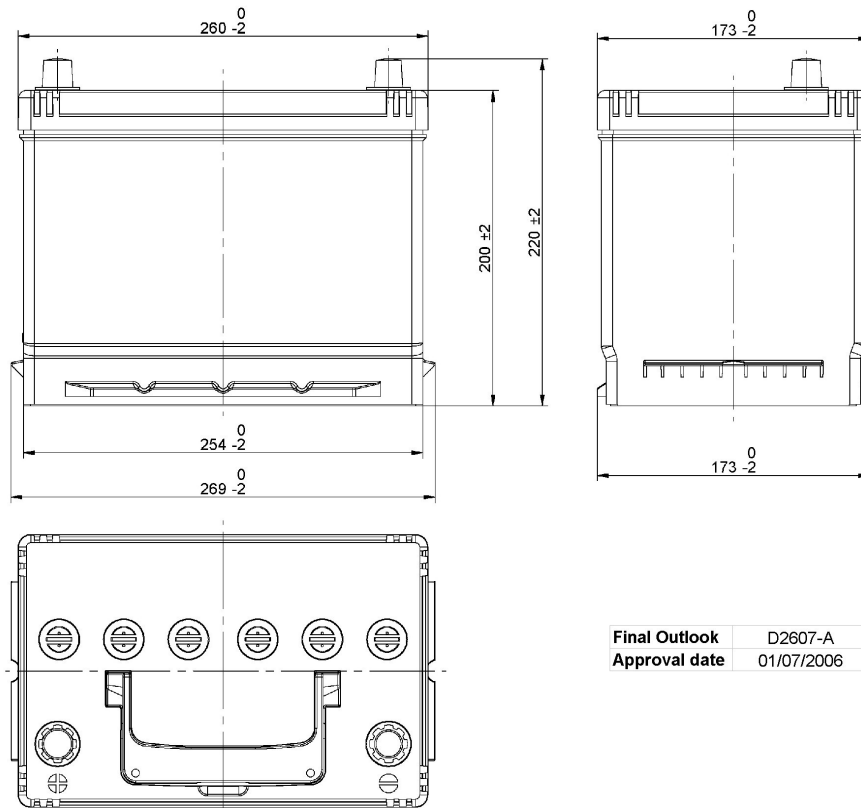

Final Outlook: D2607-A
 Approval date: 01/07/2006

PERFORMANCES

Voltage (V):	12 V	
C20 (Ah):	60.0	20 h
Cranking (A):	440	EN
Charge:	WET	
Technology:	Vented/Flooded	
Grid:	Ca/Ca	
Vibration:	V1 (30Hz+/-2Hz/3g/2h)	
Endurance:	E1 (180 cycles@25%)	

STD. DIMENSIONS

Length (mm ± 2):	270
Width (mm ± 2):	173
Height (mm ± 2):	222
Total Weight (kg ± 5%):	15.50

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	D26	BLACK
Hold Down:	Korean B1+B6	
H.D. Adapter:	No	

COVER

Type:	Flat/Screw Integrate	BLACK
Polarity:	ETN 1	
Terminals:	EN taper post	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Independent	
Filter:	No	
Lateral Plug:	No	

PLUGS

Type:	6 x M18	BLACK
-------	---------	-------

HANDLES

Type:	1 x Integrated	BLACK
-------	----------------	-------

OTHERS

Degassing Tube:	No
-----------------	----