


CUSTOMER DATASHEET


Printed: 08/11/2023


Product Management Transportation Europe

D02087C20-A Created: 31/03/2009 Central Article Code:

Modified: EF1202 31/07/2020 Local Code:

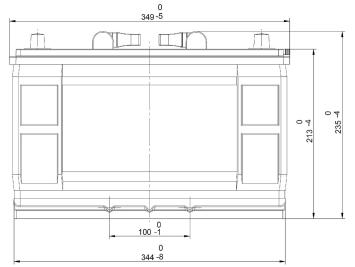





Final Outlook D0220-A 01/05/2014 Approval date

PERFORMANCES

Voltage (V): 12 V

C20 (Ah): 120.0 20 h 870 ΕN Cranking (A):

WET Charge:

Vented/Flooded Technology:

Grid: Ca/Ca

Vibration: V2+ (30Hz+/-2Hz/6g/10h)

Endurance: E2+ (110 cycles@50%)

CONTAINER

D02 **GREY MEDIUM** Type:

В1 Hold Down: H.D. Adapter: No

COVER

GREY MEDIUM Type: Flat/Press

Polarity: ETN 0

Terminals: EN taper post

Terminal Adapter: No SOCI: No Ventilation: Central

Filter: 1 Filter at Right

Lateral Plug:

STD. DIMENSIONS

Length (mm ± 2): 349 Width $(mm \pm 2)$: 175 Height (mm ± 2): 235 Total Weight (kg ± 5%): 27.50

1 x VCL Vent Type:

GREY MEDIUM

HANDLES

PLUGS

2 x Rigid BLACK Type:

OTHERS

Degassing Tube: No

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

This document includes confidential data, is not contractual and could be changed without notice. Any use, copy or distribution has to be authorised in writing by EXIDE Technologies.