


Central Article Code: GC2090G01-A Created: 06/09/2005
 Local Code: ES1000-6 Modified: 20/07/2023

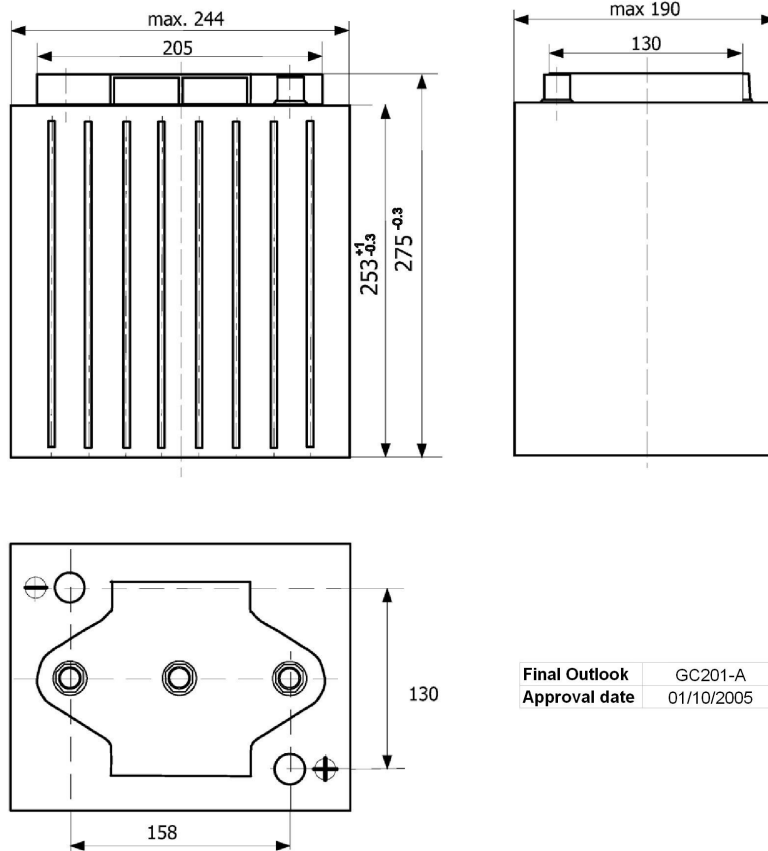

Final Outlook	GC201-A
Approval date	01/10/2005

PERFORMANCES

Voltage (V):	6 V	
C20 (Ah):	195.0	20 h
Cranking (A):	0	EN
Charge:	CHARGED	
Technology:	GEL	
Grid:	Ca/Ca	
Vibration:	V3 (30Hz+/-2Hz/6g/20h)	
Endurance:	400 cycles@100%	

STD. DIMENSIONS

Length (mm ± 2):	244
Width (mm ± 2):	190
Height (mm ± 2):	275
Total Weight (kg ± 5%):	28.00

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	GC2	BLACK
Hold Down:	B0	
H.D. Adapter:	No	

COVER

Type:	DIN	BLACK
Polarity:	ETN 0	
Terminals:	EN taper post	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Independent	
Filter:	No	
Lateral Plug:	No	

PLUGS

Type:	3 x M18 Valve	GREY MEDIUM
-------	---------------	-------------

HANDLES

Type:	None
-------	------

OTHERS

Degassing Tube:	No
-----------------	----

DNV-GL type approved 2015/Used for Bosch