
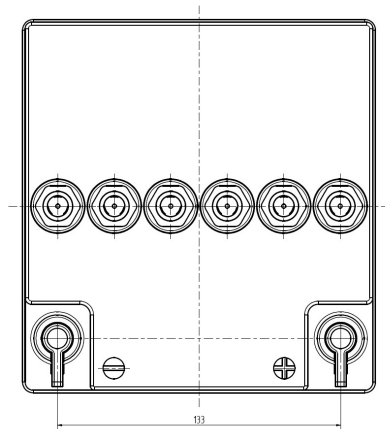
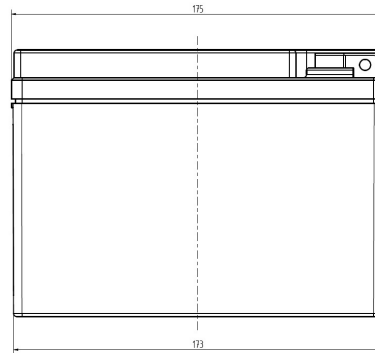


Central Article Code: P24024G01-A
 Local Code: ES290

Created: 07/09/2005
 Modified: 20/07/2023

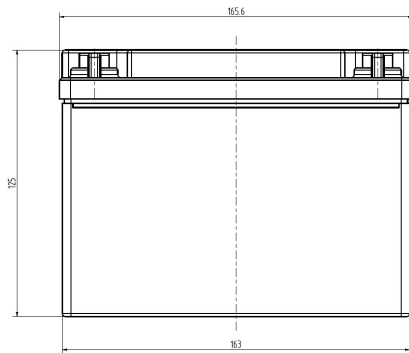

Final Outlook	P2401-A
Approval date	01/06/2013

PERFORMANCES

Voltage (V):	12 V	
C20 (Ah):	25.0	20 h
Cranking (A):	0	EN
Charge:	CHARGED	
Technology:	GEL	
Grid:	Ca/Ca	
Vibration:	V3 (30Hz+/-2Hz/6g/20h)	
Endurance:	300 cycles@100%	

CONTAINER

Type:	P24	BLACK
Hold Down:	B0	
H.D. Adapter:	No	

COVER

Type:	DIN	BLACK
Polarity:	ETN 0	
Terminals:	Flat lug hole M5	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Independent	
Filter:	No	
Lateral Plug:	No	

STD. DIMENSIONS

Length (mm ± 2):	166
Width (mm ± 2):	175
Height (mm ± 2):	125
Total Weight (kg ± 5%):	9.60

PLUGS

Type:	6 x M18 Valve	GREY MEDIUM
-------	---------------	-------------

HANDLES

Type:	None
-------	------

OTHERS

Degassing Tube:	No
-----------------	----

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

DNV-GL type approved 2015/Used for Bosch