


CUSTOMER DATASHEET

Printed: 08/11/2023

Product Management
Transportation Europe

Central Article Code: L04073C21-C Created: 24/02/2020

Local Code: EA900 Modified: 22/01/2021

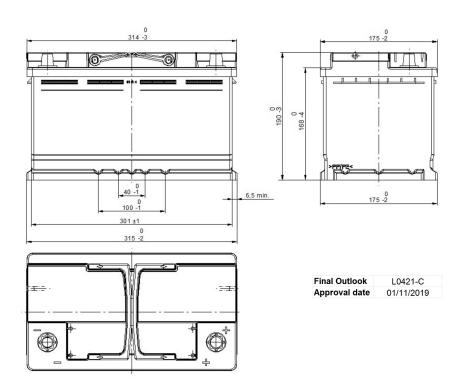

PERFORMANCES		CONTAINER	
Voltage (V):	12 V	Type:	L04 BLACK
C20 (Ah):	90.0 20 h	Hold Down:	B13
Cranking (A):	720 EN	H.D. Adapter:	No
Charge:	WET		COVER
Technology:	Vented/Flooded	Type:	Double with Integrat BLACK
Grid:	Ca/Ca	Polarity:	ETN 0
Vibration:	V1 (30Hz+/-2Hz/3g/2h)	Terminals:	EN taper post
Endurance:	E2 (90 cycles@50%)	Terminal Adapter:	No
	(00 0) 0.00@00707	SOCI:	No
		Ventilation:	Central
STD. DIMENSIONS		Filter:	2 Filters
Length (mm ± 2):	315	Lateral Plug:	Standard Left side BLACK shape
Width (mm ± 2):	175		PLUGS
Height (mm ± 2):	190	Type: 1 x Vent S	ealed PSL-OE ha BLACK
Total Weight (kg ± 5%): 19.50			HANDLES
		Type: 2 x PSL O	E Integrated BLACK
			OTHERS
		Degassing Tube:	No
All figures show nominal va and applicable European F	alues. Tolerances are according to EN50342 Regulations.		
		C.O. from L04073	C10-A (PSL-AM to PSL-OE)