


Central Article Code: L03089C23-C  
 Local Code: EL700

Created: 12/03/2019  
 Modified: 22/03/2021

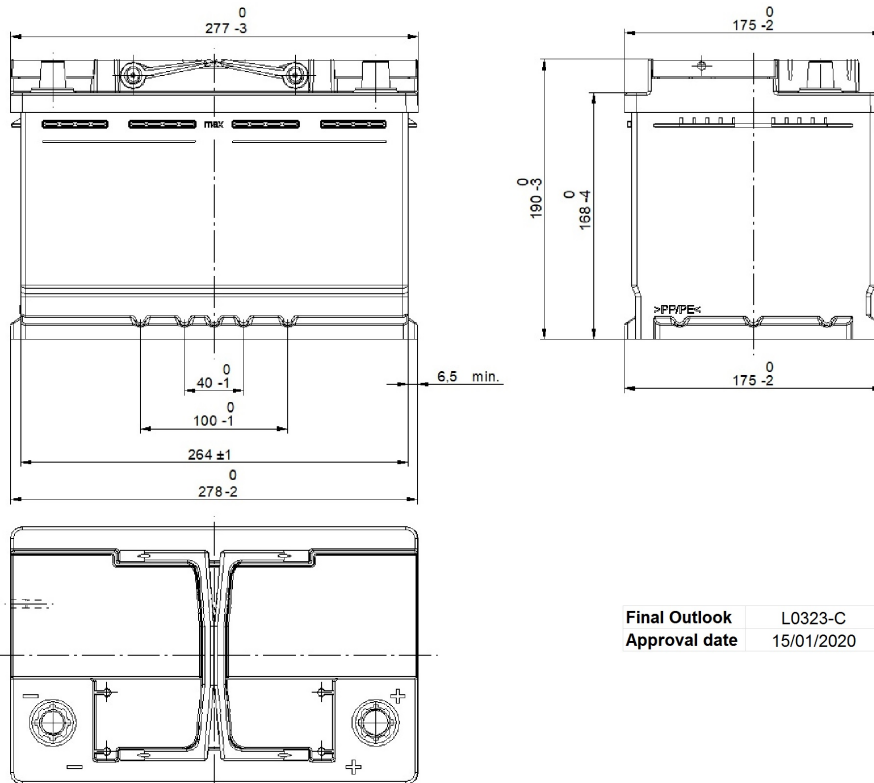

Final Outlook L0323-C  
 Approval date 15/01/2020

## PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	70.0      20 h
Cranking (A):	760      EN
Charge:	WET
Technology:	Vented/Flooded
Grid:	Ca/Ca
Vibration:	V1 (30Hz+/-2Hz/3g/2h)
Endurance:	EN-EFB Requirement

## STD. DIMENSIONS

Length (mm ± 2):	278
Width (mm ± 2):	175
Height (mm ± 2):	190
Total Weight (kg ± 5%):	19.30

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

## CONTAINER

Type:	L03      BLACK
Hold Down:	B13
H.D. Adapter:	No

## COVER

Type:	Double with Integrat      BLACK
Polarity:	ETN 0
Terminals:	EN taper post
Terminal Adapter:	No
SOCI:	No
Ventilation:	Central
Filter:	1 Filter at Left
Lateral Plug:	No

## PLUGS

Type:	1 x Vent Sealed PSL-OE ha      BLACK
-------	--------------------------------------

## HANDLES

Type:	2 x PSL OE Integrated      BLACK
-------	----------------------------------

## OTHERS

Degassing Tube:	No
-----------------	----