


Central Article Code: D26051W23-A
 Local Code: ER350

Created: 14/06/2010
 Modified: 17/02/2021

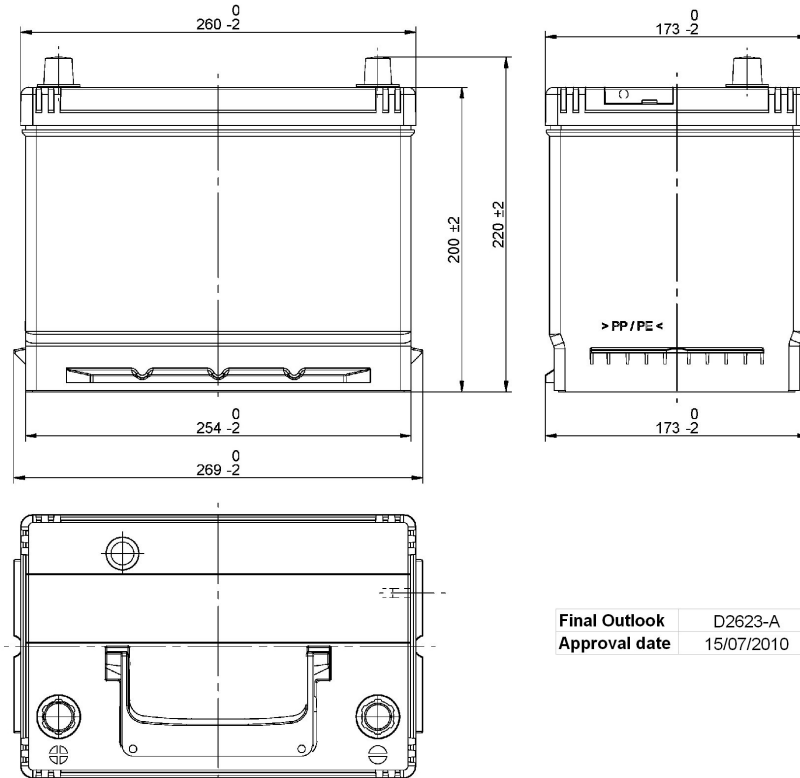

Final Outlook	D2623-A
Approval date	15/07/2010

PERFORMANCES

Voltage (V):	12 V	
C20 (Ah):	80.0	20 h
Cranking (A):	510	EN
Charge:	WET	
Technology:	Vented/Flooded	
Grid:	Hybrid	
Vibration:	V2 (30Hz+/-2Hz/6g/2h)	
Endurance:	300 cycles@40%	

STD. DIMENSIONS

Length (mm ± 2):	270
Width (mm ± 2):	173
Height (mm ± 2):	222
Total Weight (kg ± 5%):	17.40

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	D26	BLACK
Hold Down:	Korean B1+B6	
H.D. Adapter:	No	

COVER

Type:	Flat/Press integrated	BLUE LIGHT
Polarity:	ETN 1	
Terminals:	EN taper post	
Terminal Adapter:	No	
SOCI:	Black SOCI with one ball	
Ventilation:	Central	
Filter:	1 Filter at Right	
Lateral Plug:	No	

PLUGS

Type:	1 x VCL Vent	BLUE LIGHT
-------	--------------	------------

HANDLES

Type:	1 x Integrated	BLACK
-------	----------------	-------

OTHERS

Degassing Tube:	Elbow+Tube+Valve
-----------------	------------------

Tested acc. BCIS-08 Rev. Dec02